


Gravity Latch Kit

Model # - GLK

Installation Instructions

Step 1

Position both parts of the gravity latch kit on the gate frame and the post (*fig.1*). The latch should always be mounted to the post and the striker bar to the gate frame. Mount the latch on the outside of the gate to make the gate swing out. Mount the latch on the inside of the gate to make the gate swing in. Position the latch on the post at the desired location. Mark the position of the mounting holes in the gravity latch. Drill a 1/8" pilot hole and mount to the post with the screws provided.

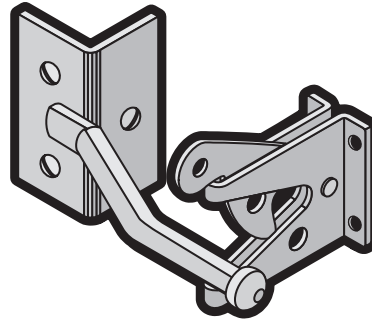

Step 2

Mark the position of the mounting holes in the striker bar. Drill a 1/8" pilot hole and mount to the gate frame with the screws provided.

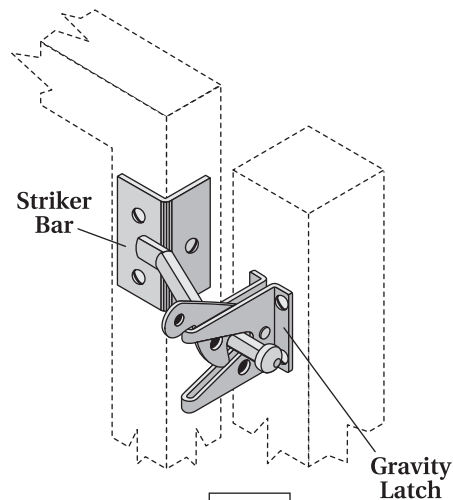


fig. 1

Tools Required

- Pencil
- Tape measure
- Drill
- 1/8" steel drill bit
- Flat blade screwdriver



A Division of the Lehigh
Consumer Products Corporation
© Leslie-Locke, Compton, CA 5/03

For questions or warranty service please
contact Leslie-Locke at (800) 755-9520
from 8:00AM to 5:00PM PST or write to
Leslie-Locke Customer Service at
675 W. Manville Street, Compton, CA 90220

